NOTES THIS SHEET

1. PROVIDE HWS/HWR, D, RS/RL PIPING, INSULATION, HANGERS, AND SUPPORTS COMPLETE.
2. PROVIDE DDC TEMPERATURE SENSOR AND CONTROL WIRING COMPLETE. MOUNT 48" AFF.
3. SEE SHUT-OFF BOX DETAILS FOR PIPING CONNECTION.
4. BALANCE TO GPM INDICATED ON VAV SCHEDULE.
5. PROVIDE WALL MOUNTED THERMOSTAT AND CONTROL WIRING COMPLETE. MOUNT APPROX. 48" AFF.
6. RELOCATED STORED THERMOSTAT. PROVIDE ADDITIONAL CONTROL WIRING AS REQUIRED.
7. PROVIDE DUCTLESS SPLIT SYSTEM EVAPORATOR. MOUNT TOP APPROX. 12" FROM CEILING. ROUTE CONDENSATE AND RS/RL CONCEALED.

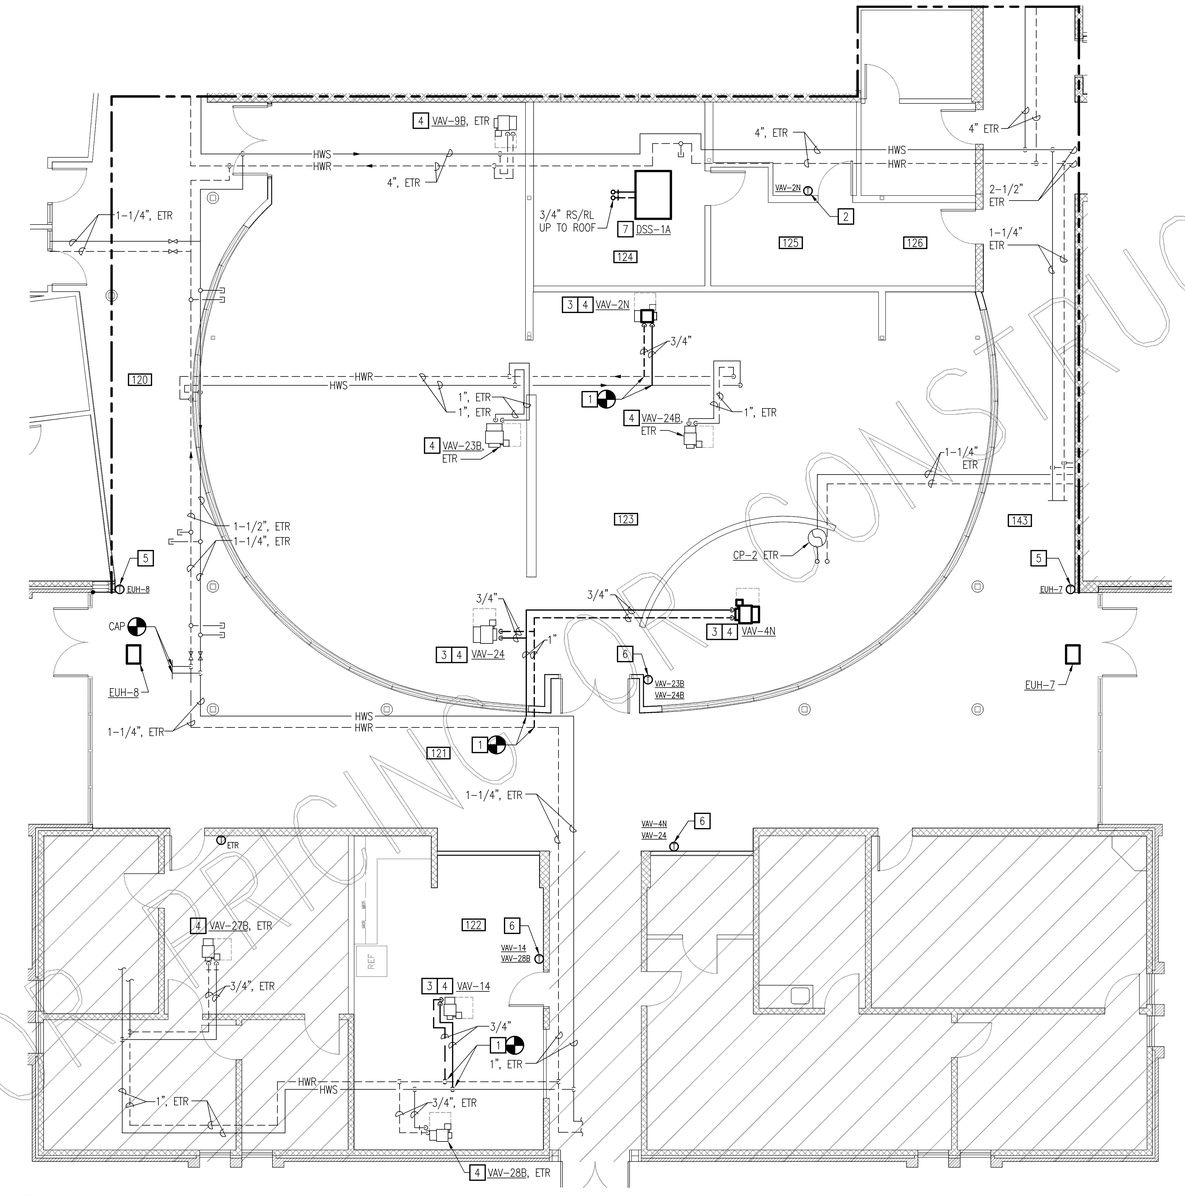

NEW WORK FLOOR PLAN - MECHANICAL PIPING

SCALE: 3/16" = 1'-0"

SECTION 1 ROOM SCHEDULE

120	CORRIDOR
121	CORRIDOR
122	FACULTY LOUNGE
123	STUDENT LOUNGE
124	SERVERS
125	TECH
126	RECORDING
143	CORRIDOR



KEYPLAN

NO SCALE

GRAPHIC SCALES

3/16" = 1'-0" 0' 5' 10' 20'

NOT FOR CONSTRUCTION

nbj ARCHITECTURE
A Professional Limited Company
GROVE PARK SQUARE
11537-B NUCKOLS ROAD
Richmond, Virginia 23059
(804) 273-9811 fax: (804) 273-9843

RAPPAHANNOCK COMMUNITY COLLEGE
CAMPUS RENOVATIONS
WARSAW + GLENNS, VIRGINIA
PC: 260-17712

WARSAW CAMPUS
NEW WORK FLOOR PLAN - MECHANICAL PIPING

Date: JANUARY 13, 2010

REVISIONS

NO.	DATE

PACE COLLABORATIVE
MECHANICAL ELECTRICAL ENGINEERS
VIRGINIA BEACH, VA · 757-499-7229

COMMONWEALTH OF VIRGINIA
JOHN M. NEWELL
Lic. No. 035329
01-13-10
PROFESSIONAL ENGINEER

Sheet
M2.6W

File Number
XX